


①	C1020
②	SUS304
③	CARTRIDGE HEATER

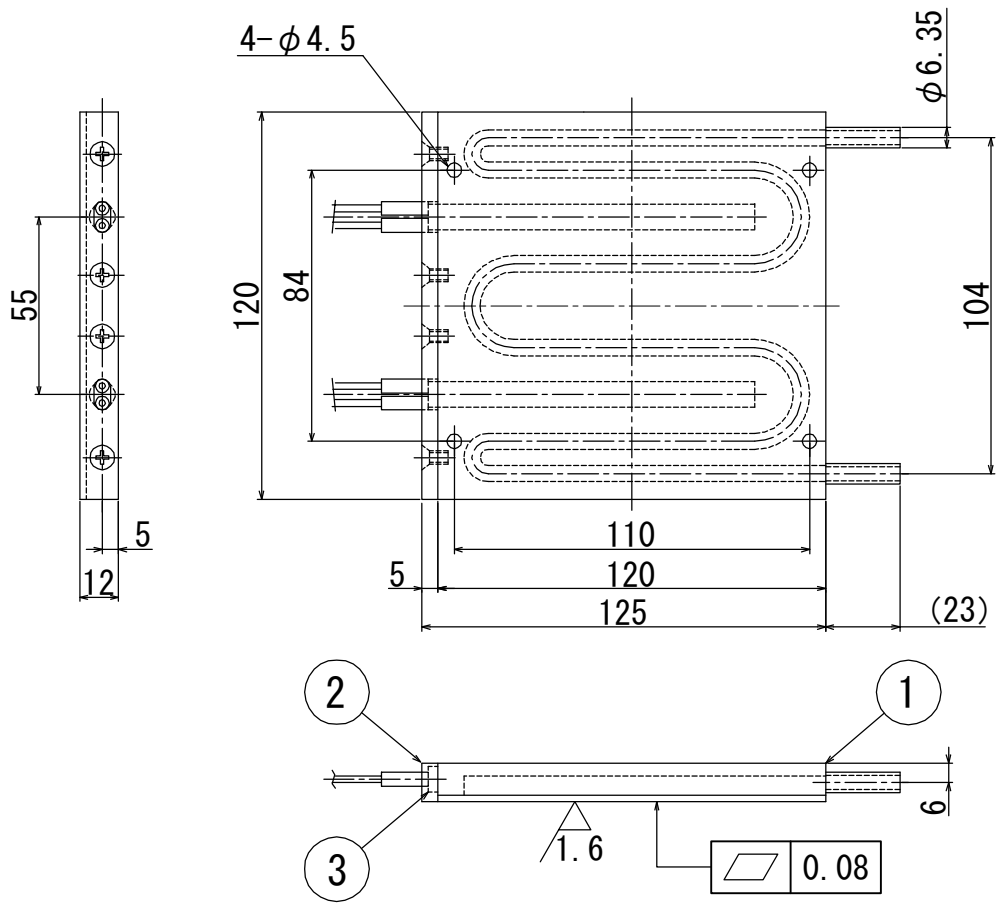

POWER : 600 [W] (300W×2)  
 VOLTAGE : CHOOSE 110 OR 220 [V]  
 MAXIMUM SURFACE TEMPERATURE : 600 [°C]MAX  
 RECOMMENDED FLOW RATE : 2~5 [L/min]  
 (LIQUID : WATER)  
 WEIGHT : ABOUT 1 [kg]  
 SCALE : NOT TO SCALE (NTS)  
 UNIT : mm  
 PROJECTION : THIRD ANGLE PROJECTION METHOD  
 DIMENSIONAL TOLERANCE : ±0.5

1. Performance data on drawings, catalogs, handling manuals, and our documentation is reference only, and is not guaranteed.
2. This product is designed by us. Production and copy of this product without our permission is not permitted.

TITLE	<b>HEATER COOLER</b>
USE FOR	TEST EQUIPMENT, MANUFACTURING EQUIPMENT, OTHERS
ITEM NUMBER	<b>HK-600C</b>