
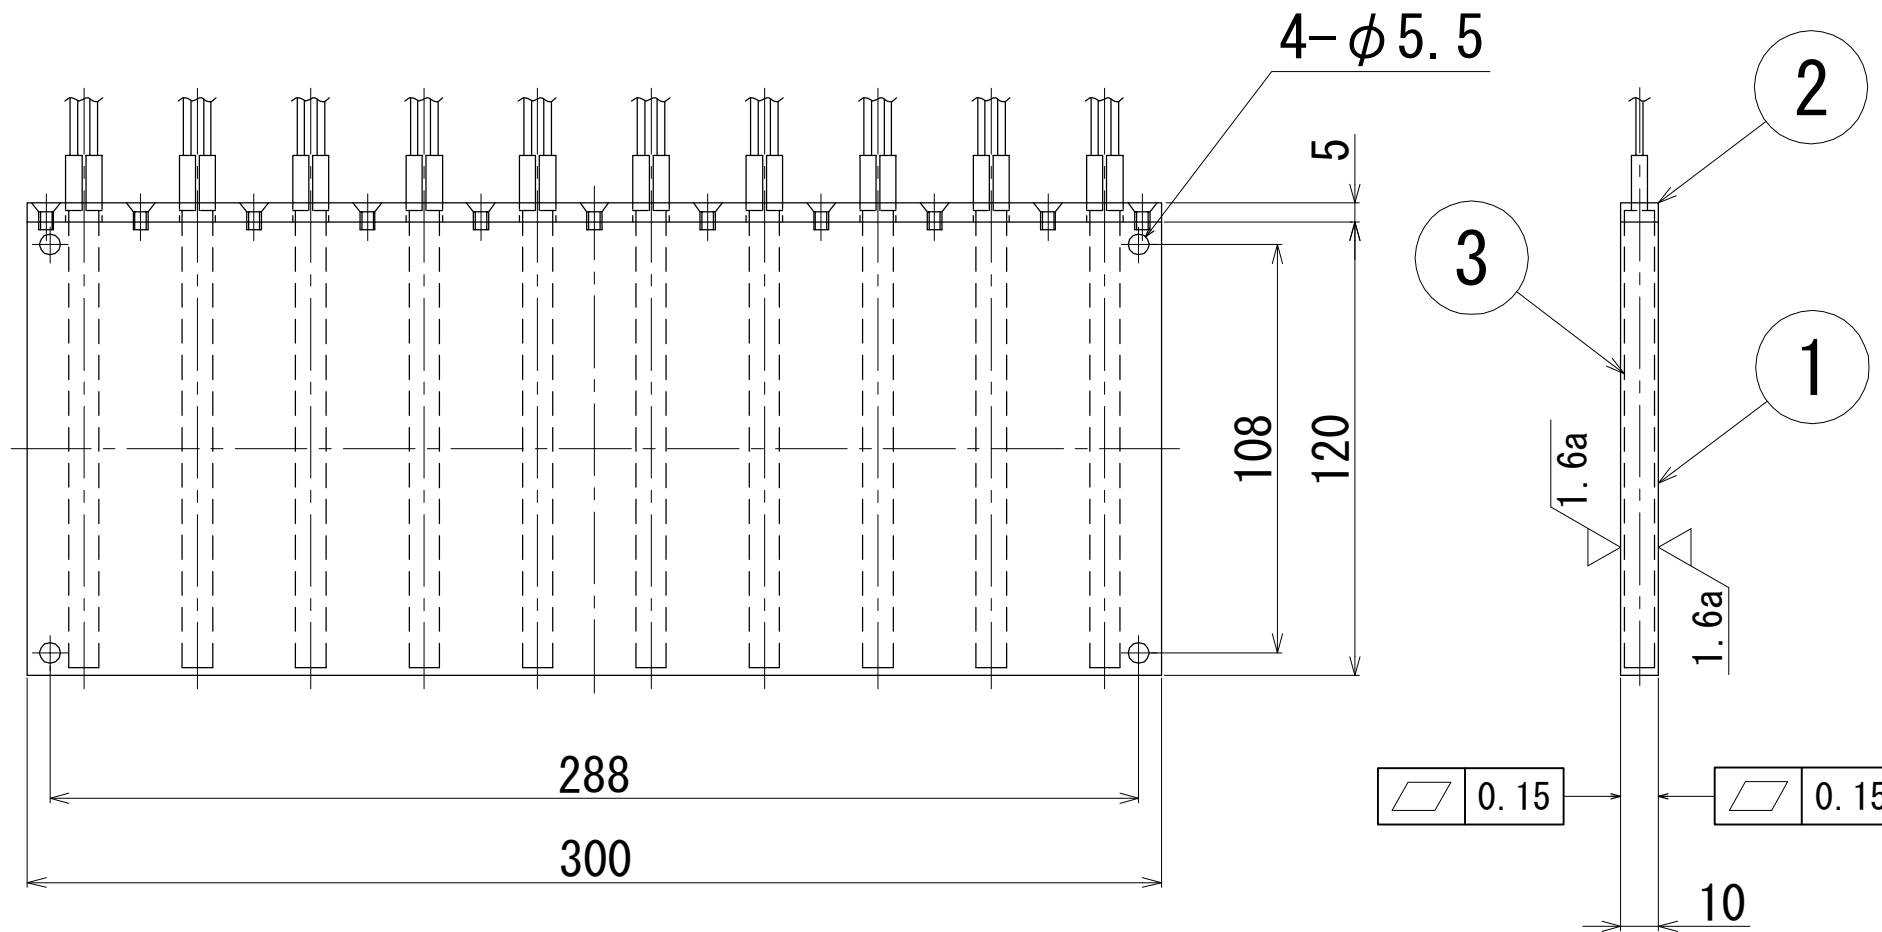


| | |
|---|------------------|
| ① | C1020 |
| ② | SUS304 |
| ③ | CARTRIDGE HEATER |

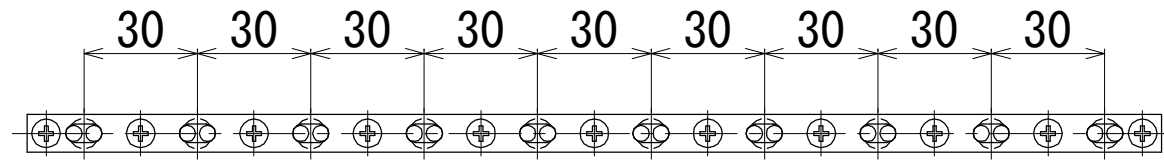

POWER : 3000 [W] (300W × 10)
 VOLTAGE : CHOOSE 110 OR 220 [V]
 MAXIMUM SURFACE TEMPERATURE : 600 [°C] MAX
 WEIGHT : ABOUT 3.7 [kg]
 SCALE : NOT TO SCALE (NTS)
 UNIT : mm
 PROJECTION : THIRD ANGLE PROJECTION METHOD
 DIMENSIONAL TOLERANCE : ±0.5

1. Performance data on drawings, catalogs, handling manuals, and our documentation is reference only, and is not guaranteed.
2. This product is designed by us. Production and copy of this product without our permission is not permitted.

| | |
|-------------|--|
| TITLE | HOT PLATE |
| USE FOR | TEST EQUIPMENT, MANUFACTURING EQUIPMENT, OTHERS |
| ITEM NUMBER | HU-3000C |